PT. KABATAMA RAYA


WIRE INDUSTRY



COMPANY PROFILE





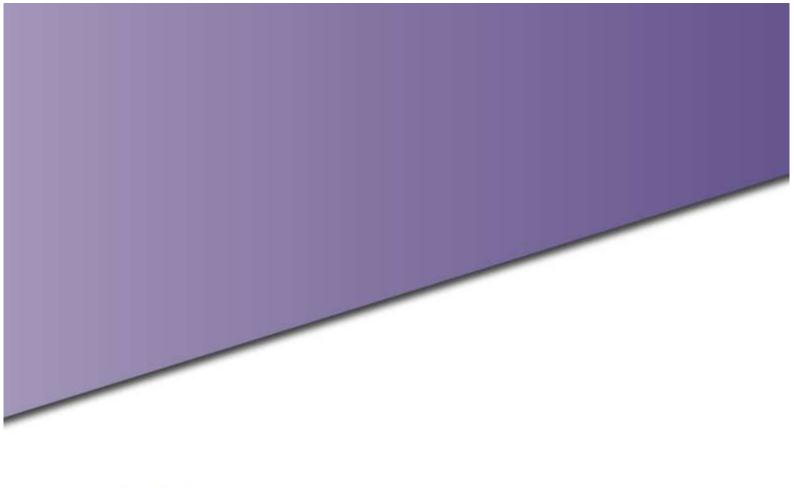

RPT. KABATAMA RAYA

COMPANY PROFILE





RPT. KABATAMA RAYA

COMPANY OVERVIEW P.4-5

PRODUCTION FACILITIES

P.6-7

PRODUCTS

P.8-12

CONTACTS

P.13

TABLE OF CONTENTS

RPT. KABATAMA RAYA



Pt Kabatama Raya is a domestic investment company specializes in the field of Industial Wire. Our company is located in the Modern Industrial Area Cikande – Serang, Banten Province, approximately 60km towards West Jakarta.

With the stronghold to the commitment and dedication to all our customers, PT Kabatama Raya will be consistently producing high quality product by utilizing the latest technology machineries from Europe, as well as expertise who have decades of experience in wire industry.

PT. Kabatama Raya prioritizes good and sustainable relationship to all our customers. Highly satisfied customers has always been our main objective in providing services towards our customers. Therefore we strive to ensure the followings to be the highest priority within our company:



Quality in accordance with customers needs, includes meeting required specifications, to support productivity of our customers



Provide competitive pricing



Responsiveness in providing service, as well as drawing on our engineer expertise to assist further in any possible cases



On time delivery according to the promised schedule



Continuous improvement every aspect of our organization has always allow us to serve customer better



PT Kabatama Raya is dedicated to the following corporate values:



Our company is a result-oriented organization focuses on planning goals, productivity, efficiency, and results.

Determination and perseverance are highly valued in order to pursue best outcomes in providing services.

Integrity and honesty are at the heart of our individuals and company actions.

Relationship between all stake-holders are highly valued in our organization, which we believe to be the main key in forming a sustainable corporation.



VISION

To be leader in Wire Industry

MISSION

Continuously Developing and Improving High Quality Product's to Fulfill Various


Customer's Needs

Build a World Class Professional Team to Provide Excellent Service

Strengthening the Relationship Among Stakeholders to Achieve Company Goal in Customer Satisfaction





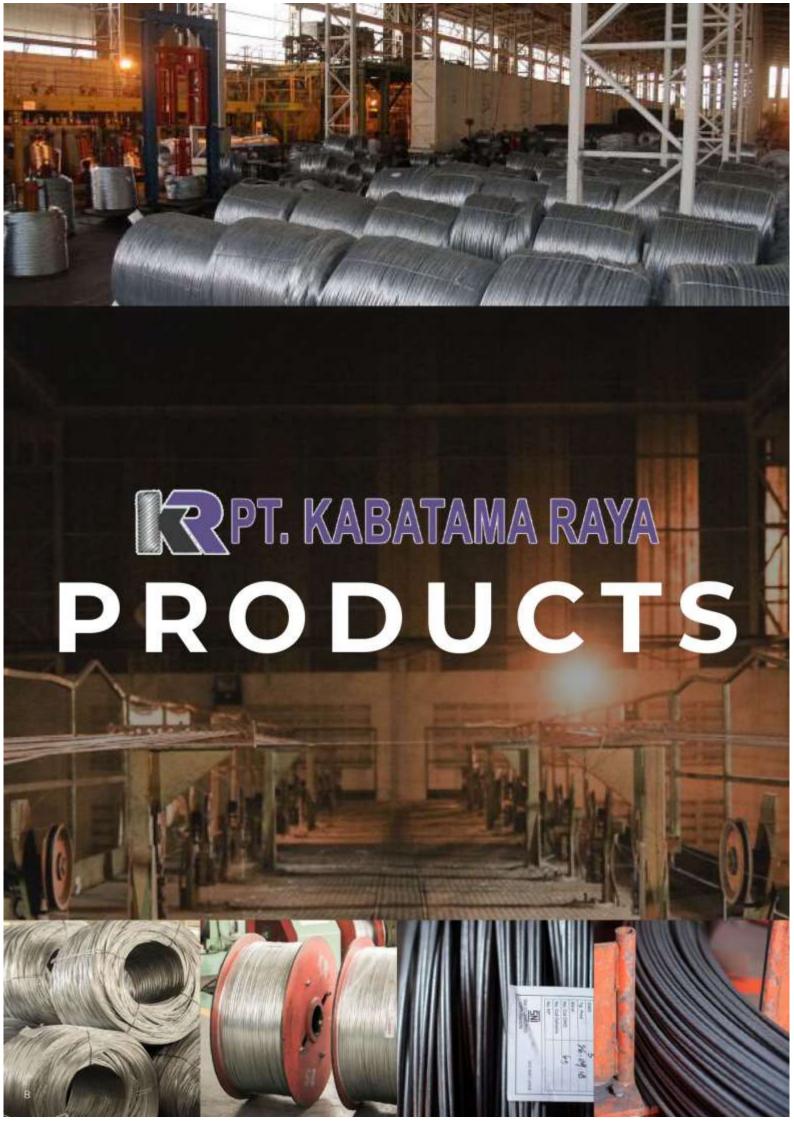

Zinc-coated Hot Dipped Galvanized Wire: Light to Heavy coating



Kabatama Raya wires are produced by leveraging on the selected quality raw materials and the latest hot dipped technology to ensure the excellent quality of galvanized wire for any application usage.

Our wires are produced in wide range of diameter sizes from 1.25 to 5.20mm, soft to hard tensile strength, as well as in different type of coating thickness depend on the wires exposure towards the different environment conditions and applications.

Light coating wires are suitable for manufactured into harmonica, stitching wire, fencing, hanger, and other general purposes. Heavy coating wires are suitable for mancufactured into gabion, chemical- hose armouring, cages, and other general purposes.

Kabatama Raya provides a tailored solution to every of our customer needs. These zinccoated galvanized wires are customizable to your needs, and produced to meet local and international standards.







Type Product	Diameter	Tolerance of Diameter	Tensile Strength	Coating Weight	Elongation	Torsion	Mass/Unit Length	Unit Weight
HEAVY COATING [Based on SNI 03-6154-1999]	2.00-4.00	±0.08 - ±0.16	Min. 401.8	min. 240 min. 260 min. 260 min. 275 min. 275 min. 290	-	min. 240 min. 260 min. 260 min. 275 min. 275 min. 290	120	650-750
LIGHT COATING	1.50-5.70	±0.05	Max. 450	min. 30				50 - 100

Armouring Wire: Round to Flat



Kabatama Raya Armouring wires are produced by leveraging on the selected quality raw materials and the latest hot dipped technology to ensure the excellent and precision quality of galvanized wire for armouring cable purposes.

Our armouring cables are available in round and flat shape form to meet your different cable armouring needs.

Kabatama Raya provides a tailored solution to every of our customer needs. These armouring wires are customizable to your needs, and produced to meet local and international standards.







Type Product	Diameter	Tolerance of Diameter	Tensile Strength	Coating Weight	Elongation	Torsion	Mass/Unit Length	Unit Weight
ARMOURING WIRE	0.80 1.25 1.50 1.60 1.80 2.00 2.50 3.15	±0.02 ±0.035 ±0.05 ±0.05 ±0.05 ±0.05 ±0.05 ±0.08	340 - 483	min. 140 min. 200 min. 200 min. 230 min. 240 min. 250 min. 275	min. 10	min. 38 min. 37 min. 37 min. 37 min. 30 min. 30 min. 24 min. 19		100 - 500

Drawn Wire: Low to High Carbon



Kabatama Raya Drawn Wires (also known as nail wire, reinforcing wire) are produced by leveraging on the selected quality raw materials (low and high carbon wire rods) and the latest technology to ensure the excellent quality of drawn wire for any application usage.

Our wires are produced in different sizes, from 1.15mm to 6mm, soft to hard tensile strength, and different grades and standards in order to meet different application usage.

Drawn wires applications are widely ranged from reinforcing concrete purposes, spring wires, to manufactured into home appliance products.

Kabatama Raya provides a tailored solution to every of our customer needs. These drawn wires are customizable to your needs, and produced to meet local and international standards.







Type Product	Diameter	Tolerance of Diameter	Tensile Strength	Coating Weight	Elongation	Torsion	Mass/Unit Length	Unit Weight
DRAWN STEEL WIRE	> 0.80 \(\geq 1.60\) > 1.60 \(\geq 2.00\) > 2.00 \(\geq 3.20\) > 3.20 \(\geq 5.00\) > 5.00 \(\geq 6.00\)	±0.05 ±0.06 ±0.08 ±0.10 ±0.13	Min. 540					50 - 100
HIGH CARBON	2.24 2.73 3.26 3.85	±0.02 ±0.04 ±0.05 ±0.06	1680 - 1760 min. 1350 min. 1289.6 min. 1289.6	- 230 245 260	min. 3 min. 3.5 min. 4	- min. 16 min. 14 min. 12	22	±800 250 250 250

PC Bar



Kabatama Raya PC BAR are produced by leveraging on the selected raw materials and the latest technology to ensure the excellent and precision quality of our PC BARs.

Our PC BARs are available in 4 market common needs, 7.10mm, 9mm, 10.7mm, and 12.60mm.

We understand that consistency of the mechanical components (tensile strength, yield strength, and elongation) of the PC BARs are crucial. Kabatama Raya commits will strictly monitor the production process to ensure the quality of PC BARs meet with your company specifications.







Type Product	Diameter	Tolerance of Diameter	Tensile Strength	Coating Weight	Elongation	Mass/Unit Length	Unit Weight
PC BAR [Based on SNI 7701:2016]	7.10 9.00 10.70 12.60		min. 1420		min.5	301 - 327 482 - 522 679 - 735 942 - 1020	100 s/d 500

CONTACTS

Kawasan Industri Modern Cikande Jl. Raya Modern Industri No. 25-27 Serang – Banten, Indonesia

- (+62-254) 849 5922
- marketing@kabatamaraya.com
- 🔀 purchasing@kabatamaraya.com
 - ⊕ kabatamaraya.com
 - f Kabatama Raya
 - (iii) kabatamaraya



